



**METROLOGY**  
SOLUTIONS



# EP-M150 PRO

High Speed & High Precision  
Metal Additive Manufacturing Equipment



# EP-M150 PRO

EP-M150 PRO adopts metal powder bed selective melting MPBF™ (Metal Powder Bed Fusion) technology, single and dual-laser printing modes are optional, supporting 200 and 500W laser, which can be perfectly used for the rapid production of high performance, high-precision parts. Compatible with most popular metal powder materials, including titanium alloy, aluminum alloy, nickel-based superalloy, Maraging steel, stainless steel, Cobalt, chromium alloy and ect. It has been applied in versatile applications such as industrial manufacturing, medical, education, dental, materials development and etc.




## « High Precision

- High laser beam quality.
- Tiny laser spot.
- High consistency and uniform laser beam quality from different positions in the building platform.

## » High Performance

- The density of printed parts can reach nearly 100 %.
- Volatility of mechanical properties < 5 %.
- In dual laser printing mode, precision deviation in alignment area  $\leq 0.15$  mm.

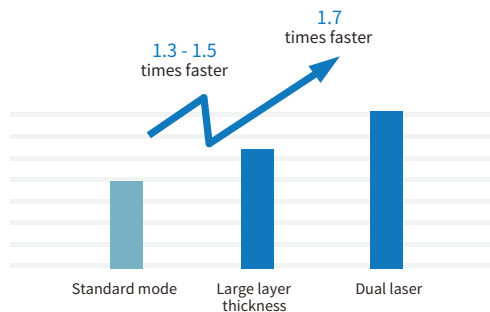

## « High Efficiency

- The Layer thickness can be up to 100  $\mu\text{m}$
- With the latest upgraded technology combining dual-laser with large layer thickness mode, the productivity has been risen for 2.3 ~ 2.7 times.



## » Openness

- High consistency, different machines could use the same set of process parameters.
- Machine compatible with multiple materials, the same machine can print multiple materials without adjusting the optical path.



2 minutes quick operation



One-click printing

## » Affordable Operation Cost

- Air consumption during processing < 3 L / min (0.3 MPa).
- Powder supply is accurate, stable and controllable, and high utilization rate of powder.
- The existing material parameter packages are provided for free.



Safety design



Anti-electric shock



Prevention of Misoperation



Fire prevention



Anti-pollution




Working environment monitoring



Gas source status monitoring




Anti-waste

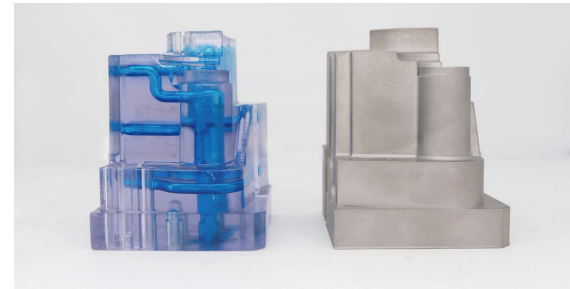

## « User Friendly Operation System

- Ergonomics overall design for users.
- With "one-click printing" function, each process is ready to run, click the "print" button on the screen to start printing.
- The replacement of filter element, residual material tank substrate and recoater can be completed within 2 minutes.

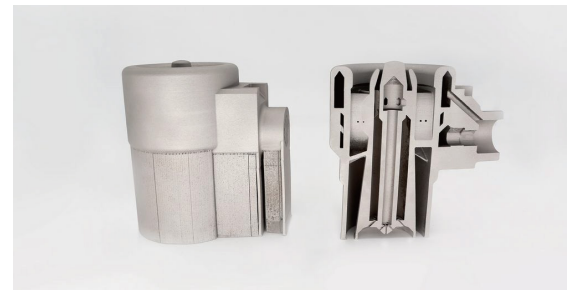

## « Safer

- Safety design, anti-misoperation, anti-electric shock, fire prevention, anti-waste, anti-pollution.
- Real-time monitoring and traceable of working environment and gas source status, safe and reliable.



# EP-M150 PRO PARAMETER

Machine Model	EP-M150 PRO
Build Chamber (XxYxZ)	Φ156mmx240mm <sup>3</sup>
Optical System	Fiber Laser, 500W (single or dual-laser optional)
Spot Size	70μm
Max Scan Speed	8m/s
Building Speed <sup>(1)</sup>	Single laser : 5~20cm <sup>3</sup> /h    Dual laser : 8~35cm <sup>3</sup> /h
Layer Thickness	20μm -100μm
Material	Titanium Alloy, Aluminium Alloy, Nickel Alloy, Maraging Steel, Stainless Steel, Cobalt Chrome, Copper Alloy, etc.
Power Supply	380V, 3P/N/PE, 12KW, 23A, 50~60Hz ( Dual laser : 13.5KW, 28A )
Gas Supply	Ar/N <sub>2</sub>
Oxygen Content	≤100 ppm
Dimension (WxDxH)	2120x980x2250mm <sup>3</sup>
Weight	1500kg
Software	EP Control, EP Hatch
Input Data Format	STL or other Convertible File

Notice: Eplus 3D reserves the right to explain any alteration of the specifications and pictures.

